



Laserliner®

DampMaster



Professional measuring device for ascertaining material moisture

Rev. 0412

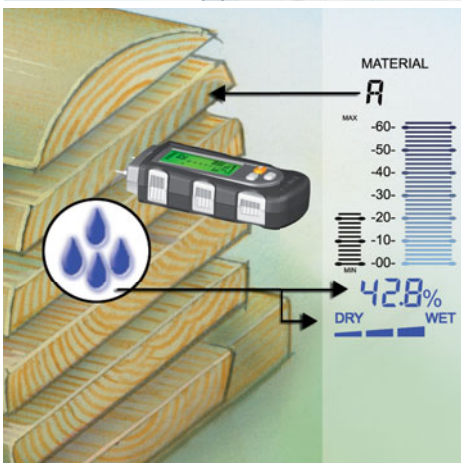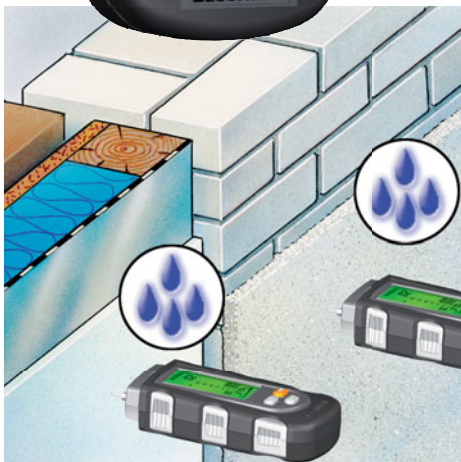

Large, illuminated LC display

High degree of accuracy thanks to selectable material groups

- Professional moisture measuring device for wood and building moisture.
- **Material groups:** selection of various material groups (wood and building materials) increase the device's measuring accuracy for material-specific measurements.
- **All measurement results at a glance:** all relevant information (material, measurement value, bar display, wet-dry indicator, MIN/MAX) is visible simultaneously on the large, illuminated LC display.
- **Wet-dry indicator:** wet-dry evaluation of measurement results provided by bar display.
- **Quick localisation of moisture:** comparison measurements can be made in **Indicator-mode** which reveal increasing or decreasing moisture based on a neutral scale.
- **Stable, ergonomic housing with protective rubber casing** makes it easier to insert the spikes, particularly in hard materials.
- **Automatic/Manual temperature compensation:** corrects falsified measurement results which would otherwise occur due to differing ambient temperature conditions.
- Display of measurement value selectable for °C or °F.
- **LCD backlight:** adjustable LCD illumination
- **Self-test function:** A reference measurement in the protective cap verifies the accuracy of the measuring device.
- **Measuring spikes can be replaced**
- **Auto power off**

TECHNICAL DATA

MATERIALS

wood, gypsum plaster, aerated concrete, screed, concrete

MEASUREMENT RANGE / ACCURACY

wood: 0 - 30 % / ± 1 %, 30 - 60 % / ± 2 %, 60 - 90 % / ± 4 %
other materials: ± 0.5 %

OPERATING TEMPERATURE 0 – 40 °C

MAX. RELATIVE HUMIDITY 85 %

POWER SUPPLY

3 x lithium 3V CR2032

WEIGHT 0.169 kg

DIMENSIONS (W x H x D)

60 mm x 115 mm x 30 mm



DampMaster

including softbag
+ batteries (3 x 3V CR2032)
+ protective cap with self-test function

Packing dimension (W x H x D)
180 x 295 x 65 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
DampMaster	082.020A	4 021563 664962	5

3x
CR 2032

SOFT