

SuperCross-Laser 2P RX set 150 cm

Crossline-Laser Set with crank tripod, laser receiver and plumb function

Rev.0712



SuperCross-Laser 2P

- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Additional plumb laser** at top and bottom.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the laser receiver RX.
- **Individually switchable** laser lines.
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range
- **Transport lock:** a pendulum lock protects unit during transport.
- **Multi-functional tripod-/wall mount:** height-adjustable with 1/4" and 5/8" tripod threads, special pins and magnets for various surfaces.

RangeXtender RX 30


- The RX **laser receiver** detects the laser lines in any ambient light up to a max. of 30 m radius – ideal for all interior and exterior applications.
- The **universal mount** enables the device to be attached to levelling staffs.
- Integrated **head magnet**

Compact Tripod 150 cm

- Crank tripod of aluminium
- 5/8" thread adapter

TECHNICAL DATA


ACCURACY ± 5 mm / 10 m
SELF-LEVELLING RANGE ± 4°
LASER RECEPTION RANGE max. 30 m radius
LASER WAVELENGTH 635 nm
LASER class 2 / < 1 mW
WEIGHT (complete set) 3,4 kg
DIMENSIONS SCL 2P (W x H x D) 66 x 119 x 124 mm

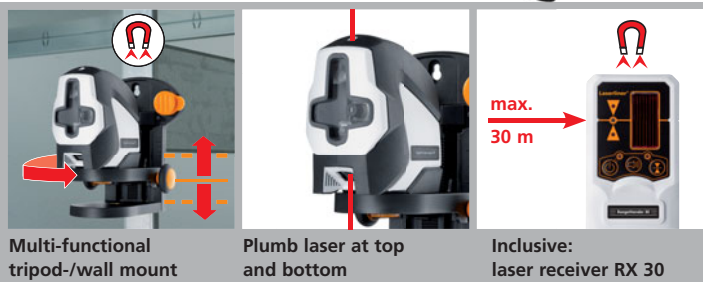

Multi-functional tripod-/wall mount

Plumb laser at top and bottom

Inclusive: laser receiver RX 30

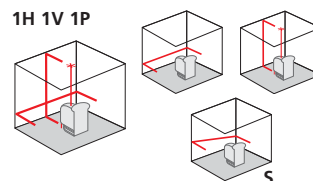

SuperCross-Laser 2P RX set 150 cm

- inclusive SuperCross-Laser 2P
- + RangeXtender RX 30
- + height-adjustable bracket
- + softbag
- + universal mount
- + batteries

- inclusive compact tripod 150 cm
- + softbag

Packing dimension (W x H x D)
185 x 895 x 175 mm

ARTICLE	ARTICLE NO	EAN CODE	PU
SuperCross-Laser 2P RX set 150 cm	081.128A	4 021563 679775	1

