




# Laserliner

## AL 26 Plus



Robust and reliable leveling instrument with high performance optics for the construction industry

Rev18W/46

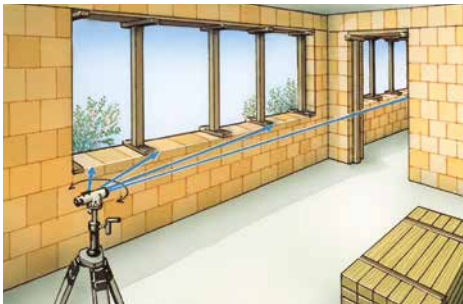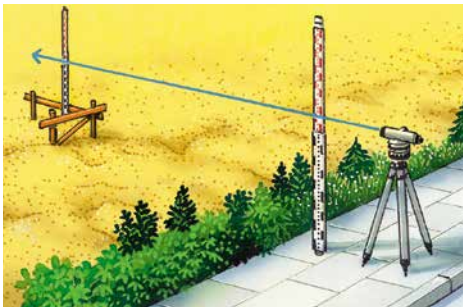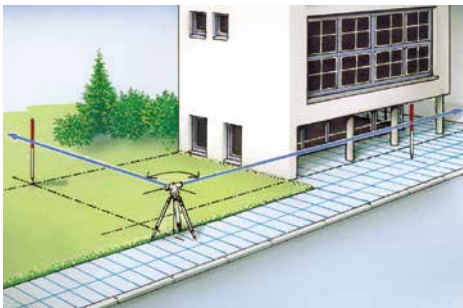

- **Automatic horizontal levelling** of the target line with precision, air-damped compensator.
- **Distance determined** with the aid of the marks on the crosshairs with **easy conversion** of the read value from centimetres to metres (multiplier 100).
- **Practical mirror** for easy alignment with circular bubble level.
- **Horizontal circle with endless vernier adjustment** for precise targeting.
- **Iron rear- and foresight** for rapid pick-up of aim.
- **Convenient controls** for easy, time-saving operation.
- Dust- and waterproof

### TECHNICAL DATA

<b>STANDARD DEVIATION</b>	
1.5 mm / km	
<b>TELESCOPE</b>	
Magnification	26 x
Minimum range	0.5 m
Objective diameter	40 mm
Field of view	1° 20'
<b>COMPENSATOR</b>	
Damping	Air damping
Range of operation	± 15'
Accuracy	0.4"
Compensation time	< 2 s
<b>HORIZONTAL DIAL 360°/400 gon</b>	
Graduation 360° - horizontal circle - 1°	
Graduation 400 gon - horizontal circle - 1 gon	
<b>LEVELLING BUBBLE ACCURACY</b>	
8' / 2 mm	
<b>OPERATING CONDITIONS</b> -20 ... 50°C, 80%rH, no condensation, max. altitude 4000 m	
<b>STORAGE CONDITIONS</b> -30 ... 60°C, 80%rH, no condensation	
<b>DEGREE OF PROTECTION</b> IP 64	
<b>TRIPOD ADAPTER</b> 5/8" thread	
<b>DIMENSIONS (W x H x D)</b>	
190 x 135 x 145 mm	
<b>WEIGHT</b> 1.4 kg	



Horizontal circle



Mirror for easy alignment



Fast sighting



**AL 26 Plus**  
 inclusive carrying case with strap  
 + Plumb bob  
 + Allen wrench  
 + Calibration needle  
**Packing dimension (W x H x D)**  
 300 x 200 x 205 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
AL 26 Plus	080.84	4 021563 705283	1

