



Laserliner

ActiveTester



Universal voltage tester for the entire electrical system of buildings

Rev18W/22

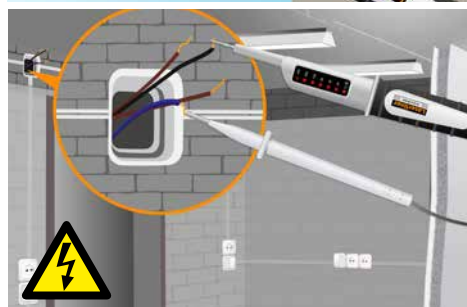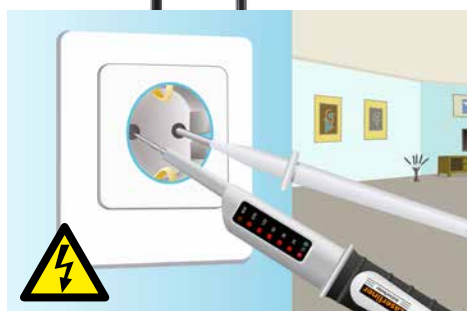

High contrast LED indicator

- **Reliable and fast voltage tester** with the most commonly used nominal voltages
- **Automatic AC voltage and DC voltage test**
- **Automatic range and function changeover** for direct testing and measurement
- **CAT III - 400V** – can be used for measurements throughout building installations
- **Operates without batteries**
- **Rugged, practical enclosure** in space-saving mini format

TECHNICAL DATA

VOLTAGE RANGES
12, 24, 36, 50, 120, 230, 400 VAC
+/- 12, 24, 36, 50, 120, 230, 400 VDC

FREQUENCY RANGE 50/60HZ

LED INDICATOR
12, 24, 36, 50, 120, 230, 400 V
Polarity plus/minus

TOLERANCE
-30% to 0% of reading

RESPONSE TIME < 0.1 s, LED

OVERVOLTAGE CATEGORY
CAT III - 400 V

POLLUTION DEGREE 2

HUMIDITY
max. 85% relative humidity

TYPE OF PROTECTION IP64

POWER CONSUMPTION
I_s < 0.2 A / I_s (5s) < 3.5 mA
(cycle: 5% switch-on duration / 10 min.)

OPERATING CONDITIONS
-10°C ... 55°C, Max. humidity 80%rH,
no condensation, Max. working
altitude 2000 m above sea level

DIMENSIONS (W x H x D)
60 x 245 x 25 mm (without cable)

WEIGHT 115 g



ActiveTester
+ protective covers

Packing dimension (W x H x D)
190 x 310 x 55 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
ActiveTester	083.020A	4 021563 671151	5

CAT III
400V

IP 64