


Laserliner®

AutoSmart-Laser 100 set

Rev.0712

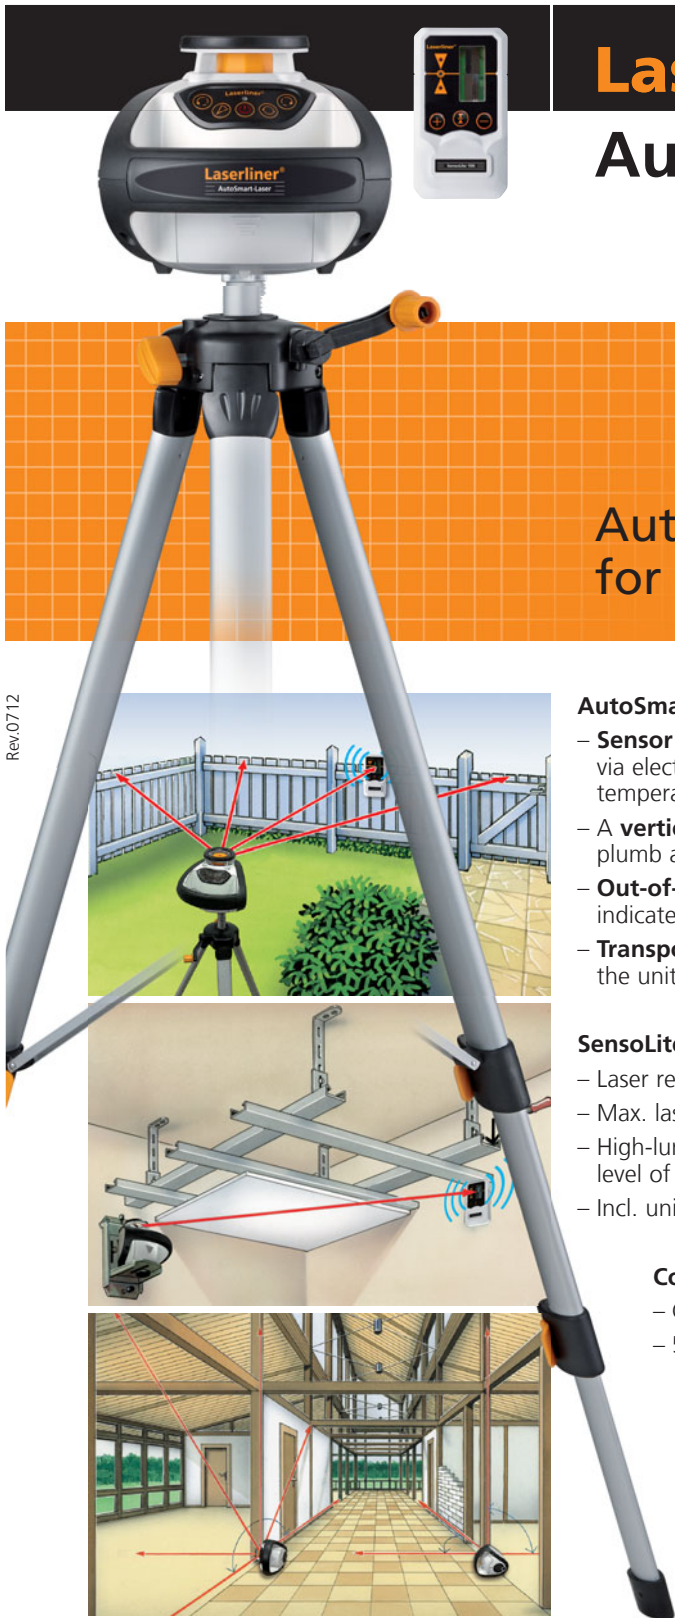

Automatic rotary laser for indoors and outdoors

AutoSmart-Laser



- **Sensor Automatic:** fully automatic alignment via electronic positioning motors controlled by temperature-stable sensors.
- A **vertical reference beam** is provided to plumb and align partition walls.
- **Out-of-level:** The device emits visual signals to indicate that it is out of the levelling range.
- **Transport Lock:** a special motor lock protects the unit during the transport.

SensoLite 100

- Laser receiver with head magnet.
- Max. laser reception range 100 m radius.
- High-luminosity LEDs and melodies indicate the level of the laser beam.
- Incl. universal mount.

Compact Tripod 150 cm

- Crank tripod of aluminium
- 5/8" thread adapter

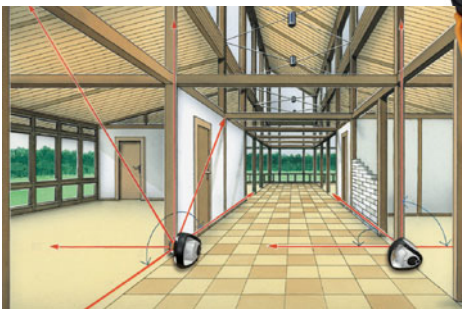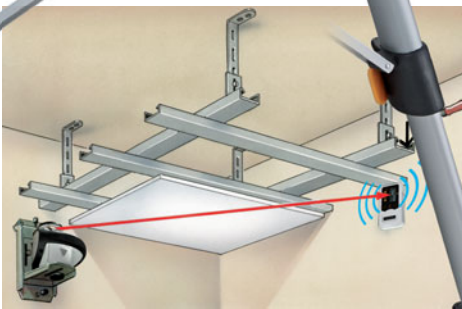

Sensor-Automatic



Vertical operating position




Compact laser receiver

ARTICLE	ARTICLE NO	EAN-CODE	PU
AutoSmart-Laser 100 set	055.04.00A	4 021563 674992	1



TECHNICAL DATA

ACCURACY ± 4 mm / 10 m
SELF-LEVELLING RANGE ± 4°
LEVELLING horizontal and vertical automatic
LASER RECEPTION RANGE max. 100 m radius
LASER MODES spot, scan, rotary and hand receiver mode
LASER WAVELENGTH 635 nm
LASER class 2 < 1 mW
POWER SUPPLY 4 x type AA, approx. 12 hrs operating time
PROTECTION CLASS IP 54
WEIGHT 4,2 kg
DIMENSIONS (W x H x D) 155 x 130 x 150 mm



AutoSmart-Laser 100 Set

- inclusive AutoSmart-Laser
- + SensoLite 100
- + universal mount
- + softbag
- + batteries

- inclusive compact tripod 150 cm
- + softbag

Packing dimension (W x H x D)
185 x 895 x 175 mm