


Laserliner®

MultiMeter-Pocket



Universal multimeter in practical format – fully protected in all areas

Rev. 0910

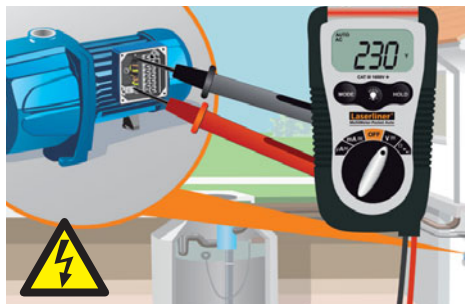

- Reliable, fast and precise **voltage, current and resistance measurement**
- **Automatic continuity tester** with acoustic signal
- **Diode test function** for determining integrity and polarity
- **Fully protected design** in all measuring ranges prevents operating errors
- **Automatic function and range changeover** without reconnecting cables
- **CAT III - 1000 V** – can be used for measurements throughout building installations
- **Integrated contactless voltage indicator** with acoustic and visual warning
- **High measurement resolution** for precisely determining different measurement variables
- **Data HOLD function** for measuring in inaccessible places
- **Super-bright integrated flashlight** for illuminating test point
- **Rugged, practical enclosure** with safe, dual-coated test prods
- **Large, easy-to-read LC display**

TECHNICAL DATA

MAX. INPUT VOLTAGE 600 V AC/DC
VOLTAGE RANGE DCV: 0...600 V ±0.5% ACV: 0...600 V ±1.2%
CURRENT RANGE DCA: 0...200 mA ± 2.0% ACA: 0...200 mA ± 2.5%
RESISTANCE RANGE 0...20 Mohm ± 0.8%
CONTINUITY TEST Resistance range <1.5 kohm
OVERVOLTAGE CATEGORY CAT III - 1000 V, pollution degree 2
FUSE mA, µA range: 0.2 A/500 V
LC DISPLAY Up to 1999 (3.5 segments)
TYPE OF PROTECTION IP 64
POWER SUPPLY 2 x 1.5V AAA (NEDA24A/IEC LR 03)
OPERATING TEMPERATURE -10 °C...55 °C
DIMENSIONS 120 x 55 x 40 mm
WEIGHT 145 g



LC Display



Easy-to-use rotary function knob



Test prod holder



MultiMeter-Pocket
+ batteries (2x 1.5V AAA)

Packing dimension (B x H x D)
110 x 235 x 70 mm

ARTICLE	ARTICLE NO.	EAN CODE	PU
MultiMeter-Pocket	083.032A	4 021563 671229	5