




Laserliner®

Quadrum OneTouch 400 Pro S



One-button operation rotary laser. For horizontal levelling over great distances.


Rev:0717

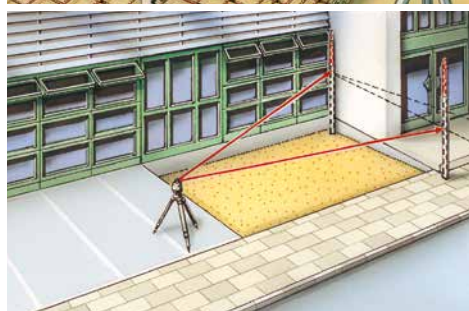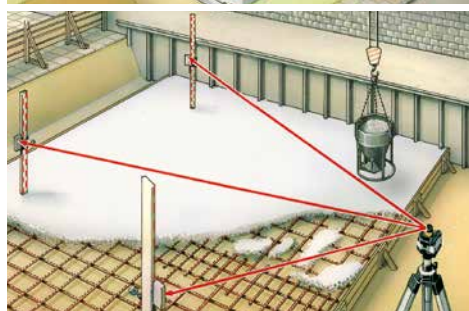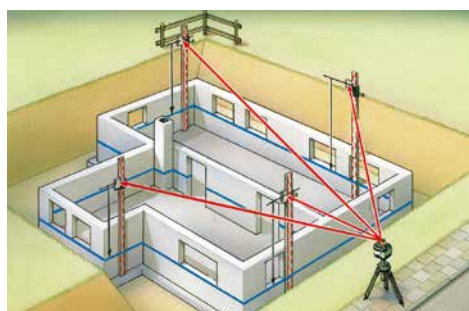

- Robust **waterproof** housing
- **OneTouch operation:** The laser is switched over from setup mode (AntiShake) into secure mode (ADS-Tilt) with a single press of a button - simple operation.
- **Sensor Automatic:** electronic positioning motors controlled by temperature-stable sensors make horizontal alignment automatically.
- **AntiShake:** for rapid set-up, on vibrating surfaces and in windy conditions.
- **ADS tilt:** automatic shutoff by ADS (Anti-drift system) when there is an external disturbance.
- A **manual slope mode** permits the layout of gradients up to 5°.
- The **SensoMaster 400 Pro** an extreme large reception field, front and rear side LC displays – with a display of distance to laser level accurate to the millimetre.
- All functions of the rotary laser can be controlled with the **remote control** from up to 40 m.
- The **4 IR receiving diodes** allow this instrument to be remotely operated from all sides.
- **Transport Lock:** a special motor lock protects the unit during the transport.
- Long service life thanks to **effective power supply**.

TECHNICAL DATA

ACCURACY ± 0.075 mm / m
SELF-LEVELLING RANGE ± 5°
LEVELLING horizontal automatic
LASER RECEPTION RANGE max. 400 m radius
LASER MODES spot, scan, rotary and hand receiver mode
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY rechargeable batteries, approx. 35 hrs operating time, approx. 7 hrs charging time, alkaline batteries, approx. 50 hrs operating time
PROTECTION CLASS Quadrum IP 66, SensoMaster 400 Pro IP 67
WEIGHT 2.6 kg
DIMENSIONS (W x H x D) 215 x 205 x 165 mm



OneTouch operation



Water and dust protection per IP 66



Efficient power supply



Laser receiver SensoMaster 400 Pro



Quadrum OneTouch 400 Pro S

- inclusive carrying case
- + SensoMaster 400 Pro
- + universal mount
- + remote control
- + rechargeable batteries
- + battery compartment
- + power supply/battery charger
- + batteries

Packing dimension (W x H x D)
470 x 380 x 210 mm

ARTICLE	ARTICLE-NO	EAN-CODE	PU
Quadrum OneTouch 400 Pro S	053.250A	4 021563 700110	1

