

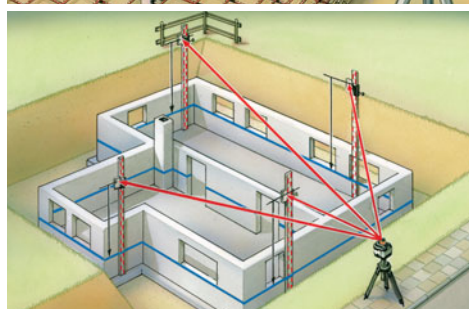


Quadrum OneTouch 410 S

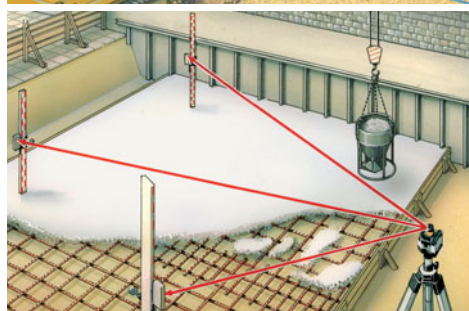

One-button operation rotary laser. For horizontal levelling over great distances.


Rev.0512

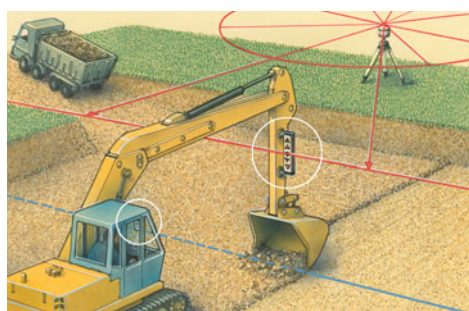

- Robust **waterproof** housing
- **OneTouch operation:** The laser is switched over from setup mode (AntiShake) into secure mode (ADS-Tilt) with a single press of a button - simple operation.
- **Sensor Automatic:** electronic positioning motors controlled by temperature-stable sensors make horizontal alignment automatically.
- **AntiShake:** for rapid set-up, on vibrating surfaces and in windy conditions.
- **ADS tilt:** automatic shutoff by ADS (Anti-drift system) when there is an external disturbance.
- A **manual slope mode** permits the layout of gradients up to 5°.
- With its extra long receiver unit, the **SensoLite 410** enables quick laser acquisition over great distances. LC displays at the front and rear, super-bright three-colour signal LEDs and melodies indicate the level of the laser beam. Tough, waterproof housing with powerful head and side magnets.
- All of the rotary laser's functions can be controlled with the **remote control** unit.
- The **4 IR receiving diodes** allow this instrument to be remotely operated from all sides.
- **Transport Lock:** a special motor lock protects the unit during the transport.
- Long service life thanks to **effective power supply**.

TECHNICAL DATA

ACCURACY ± 0.75 mm / 10 m
SELF-LEVELLING RANGE ± 5°
LEVELLING Horizontal automatic
LASER RECEPTION RANGE max. 400 m radius
LASER MODES spot, scan, rotary and hand receiver mode
LASER WAVELENGTH 635 nm
LASER class 3R, < 5 mW
POWER SUPPLY rechargeable batteries for 35 hours alkaline batteries for 50 hours
WATER AND DUST PROTECTION Quadrum IP 66, SensoLite 410 IP 67
WEIGHT 2.6 kg
DIMENSIONS (W x H x D) 215 x 205 x 165 mm




Quadrum OneTouch 410 S

- including carrying case
- + SensoLite 410
- + universal mount
- + high-performance battery
- + battery compartment
- + remote control
- + mains unit / charger
- + batteries

Packing dimension (W x H x D)
410 x 265 x 250 mm



OneTouch operation



Water and dust protection per IP 66



Efficient power supply



Illuminated LC display, super-bright signal LEDs

ARTICLE	ARTICLE-NO	EAN-CODE	PU
Quadrum OneTouch 410 S	053.200A	4 021563 677849	1

