




Laserliner®

SmartCross-Laser set



Automatic cross-line laser with universal clamping bracket

Rev.0316

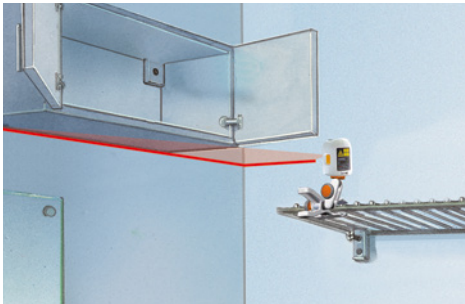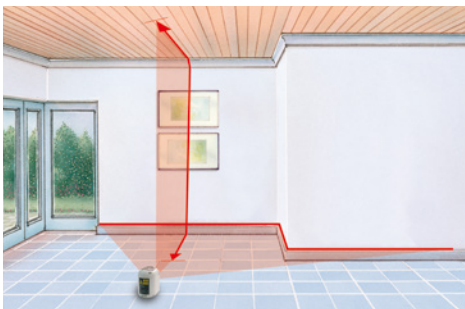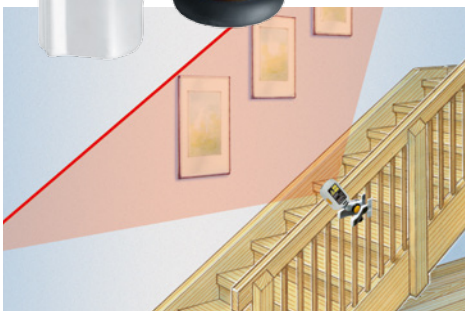

SmartCross-Laser


- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport Lock:** a pendulum lock protects unit during transport.
- **Simple, uniform operating techniques**

FlexClamp

- **Height and position of the measuring device** easily adjustable using with crossline lasers for interior finishing work
- **Versatile damage free mounting options** for surfaces
- Suitable for all laser measuring devices with 1/4" threads

TECHNICAL DATA

SELF-LEVELLING RANGE ± 5°
ACCURACY ± 0,5 mm / m
OPERATING RANGE (depending on room illumination) 10 m
LASER WAVELENGTH 650 nm
LASER CLASS / LINE LASER OUTPUT POWER 2 / < 1 mW
POWER SUPPLY 2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME 15 hours (alkaline batteries)
OPERATING TEMPERATURE 0°C ... +40°C
STORAGE TEMPERATURE -10°C ... +70°C
DIMENSIONS (W x H x D) 55 x 85 x 75 mm (SmartCross-Laser)
WEIGHT (complete set) 675 g




SmartCross-Laser set


inclusive SmartCross-Laser
+ FlexClamp
+ batteries
Packing dimension (W x H x D)
175 x 295 x 85 mm



Automatic Level



Pendulum can be locked for protection during transport



Adjustable and free mounting options

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartCross-Laser set	081.116A	4 021563 694389	4

