Laserliner®

SuperCross-Laser 3 set 330 cm

Cross-line laser with additional reference line with telescopic tripod

Rev.0712

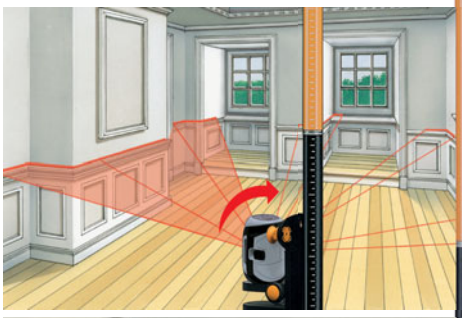

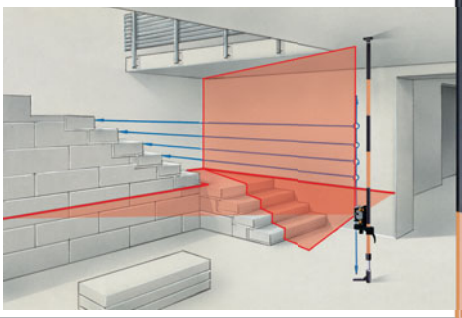

Height adjustable tripod-/wall mount

Tripod-/wall mount magnetic

SuperCross-Laser 3

- Very bright, automatic laser lines **with front laser cross and 90° side laser line**.
- The **90° position of the vertical laser lines** can be used to produce a right angle on the floor and project a plumb line on slanted walls.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines.
- **Additional slope mode** to align angled surfaces.
- **Out-Off-level:** is indicated by optical and acoustic signals when the unit is outside its self-levelling range.
- **Transport lock:** A pendelum lock protects unit during transport.
- **Multi-functional tripod-/wall mount:** height-adjustable with 2 tripod threads, special pins and magnets for various surfaces.
- **Simple, uniform operating techniques**

Telescopic stand 330 cm

- Made of high-quality **aluminium**
- Permits **quick position changes** ideal for work near at near floor/ceiling level.

1H 2V

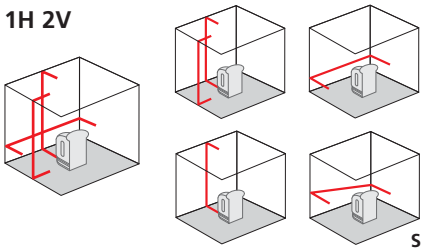

TECHNICAL DATA
ACCURACY ± 5 mm / 10 m
SELF-LEVELLING RANGE ± 5°
LASER WAVELENGTH 635 nm
LASER CLASS 2M / < 5 mW
WEIGHT (complete set) 4,3 kg
DIMENSIONS SCL 3 (W x H x D) 70 x 122 x 100 mm

ARTICLE	ARTICLE NO	EAN CODE	PU
SuperCross-Laser 3 set 330 cm	081.141A	4 021563 679782	2

SuperCross-Laser 3 set 330 cm

inclusive SuperCross-Laser 3
+ height-adjustable bracket
+ softbag
+ batteries

inclusive telescopic stand 330 cm
+ softbag
+ telescopic adapter

Packing dimension (W x H x D)
180 x 1080 x 200 mm

Laser 635 nm · 2M · AUTOMATIC LEVEL · lock · magnetic · 1/4" · 5/8" · 4x AA · SOFT

UMAREX GmbH & Co. KG · Donnerfeld 2 · 59757 Arnsberg · Germany · Fon +49 2932 638-300 · Fax +49 2932 638-333 · laserliner@umarex.de · www.laserliner.com