

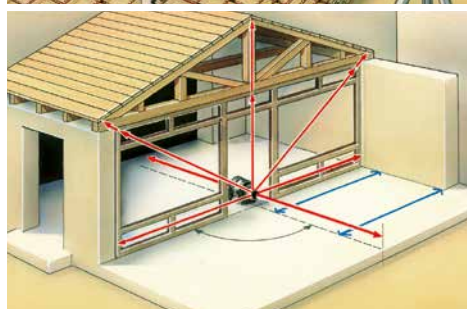


Quadrum DigiPlus 400 Pro S

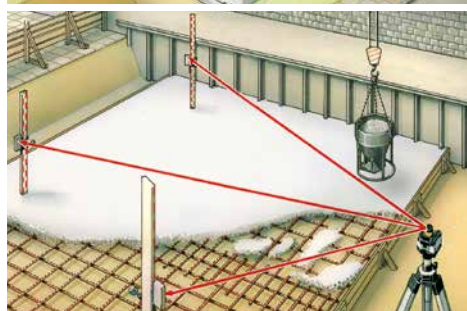

2-axis inclination laser


Rev.0717

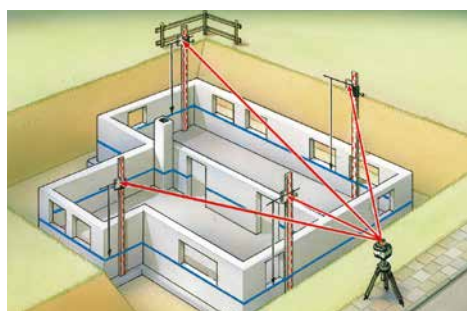

- **Digital gradient setting:** deviation from the horizontal plane can set digitally in X and Y axes.
- Robust **waterproof** housing.
- **Sensor Automatic:** fully automatic alignment via electronic positioning motors controlled by temperature-stable sensors.
- **ADS tilt:** automatic shutoff by ADS (**Anti-drift system**) when there is an external disturbance.
- The additional **reference beam** makes it easier to plumb and align partition walls.
- All settings are presented on the **large LC display**.
- The **SensoMaster 400 Pro** an extreme large reception field, front and rear side LC displays – with a display of distance to laser level accurate to the millimetre.
- The **manual slope mode** permits gradients exceeding 6° to be laid out.
- All functions of the rotary laser can be controlled with the **remote control** from up to 40 m.
- The **4 IR receiving diodes** allow this instrument to be remotely operated from all sides.
- **Transport Lock:** a special motor lock protects the unit during the transport.

TECHNICAL DATA


ACCURACY ± 0.075 mm / m
SELF-LEVELLING RANGE ± 6°
LEVELLING horizontal and vertical automatic
LASER RECEPTION RANGE max. 400 m radius
LASER MODES spot, scan, rotary and hand receiver mode
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY rechargeable batteries, approx. 35 hrs operating time, approx. 7 hrs charging time, alkaline batteries, approx. 50 hrs operating time
PROTECTION CLASS Quadrum DigiPlus IP 66, SensoMaster 400 Pro IP 67
WEIGHT 2.6 kg
DIMENSIONS (W x H x D) 215 x 205 x 165 mm



Quadrum DigiPlus 400 Pro S

- inclusive carrying case
- + SensoMaster 400 Pro
- + universal mount
- + remote control
- + rechargeable batteries
- + battery compartment
- + power supply/battery charger
- + batteries

Packing dimension (W x H x D)
470 x 380 x 210 mm



Vertical operating position



Water and dust protection per IP 66



Clearly arranged, illuminated LC display



Laser receiver SensoMaster 400 Pro

ARTICLE	ARTICLE-NO	EAN-CODE	PU
Quadrum DigiPlus 400 Pro S	053.400A	4 021563 684007	1

